

FLEX^{NX}

SIMPLE. FLEXIBLE. TRUSTED.



Flex NX Support



Quick Start Guide
MN73-190 Rev A

We've Got Your Back


Our promise to you is to provide comprehensive training, unrivaled customer support and world class expertise. That's why your Flex NX comes with our industry-leading two-year warranty, complimentary training, and technical support access. For more information, visit us at www.geophysical.com.

We're Committed to Your Success


Our team of dedicated technical trainers is ready to work with users of all experience levels. GSSI Academy classes are offered on a revolving annual schedule. Check out the GSSI Academy offerings at www.geophysical.com/gssi-academy.





Flex NX Controller
FGFLEX NX

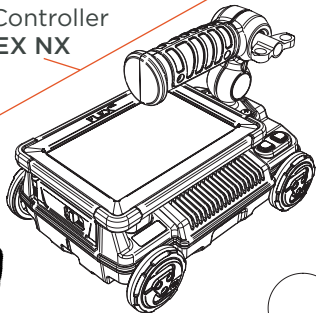


Wrist Lanyard
F-73-159



Extra RAM® Mount
RAM-238U

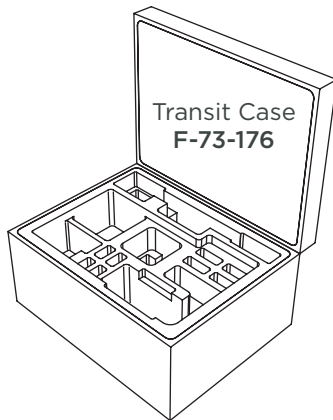

Lithium-Ion Battery (2X)
FGNX-BAT-3 CELL




2-Bay Charger
FGMODBC-NX




Quick Start Guide
MN73-190

What's Included

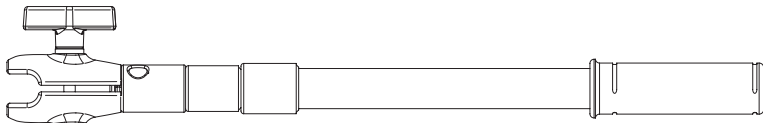


Telescoping Pole with RAM Grip - 0.5m-1.2m (1.7ft-4.0ft)
For use with Flex NX and NX25

FGNX-POLE

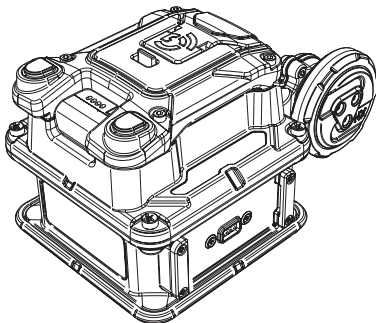

NX25 Wireless Satellite Antenna


FGNX25



NX25 Lithium-Ion Battery (2X)


FGNX-BAT-2 CELL

Flex NX Physical Features

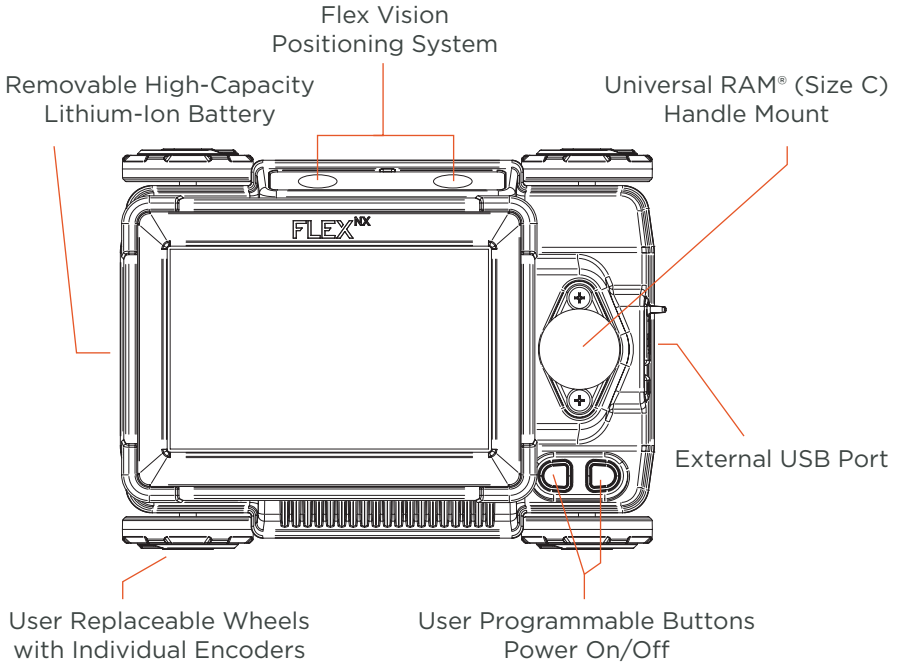


Flex NX Handle Adjustment


Your Flex NX features a fully adjustable and removable handle. To adjust, simply loosen the knob, reorient the handle, and tighten. To remove the handle, fully loosen the knob.

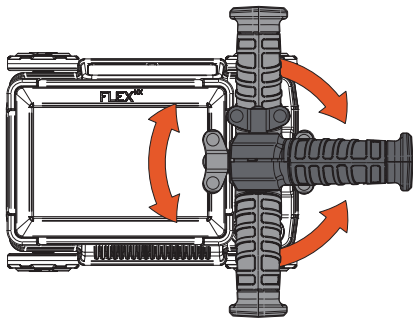


Vertical range of movement is limited to prevent display damage.

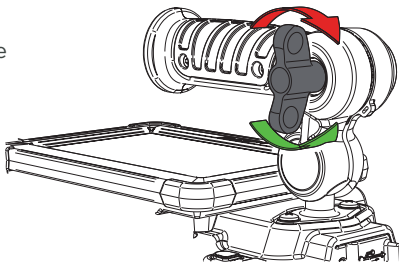


360 degree range of horizontal motion.

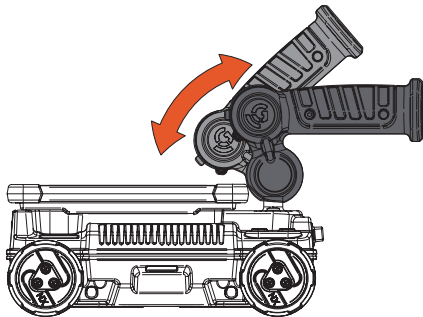


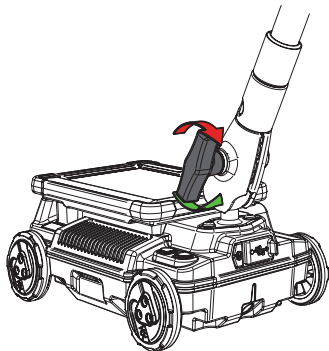

Attaching the Telescoping Pole Accessory (sold separately) to Flex NX.

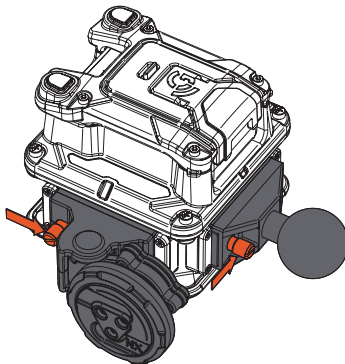


The NX25 Pole Mount Adapter and Survey Wheel attachment locations are interchangeable. **Note:** They can only attach in orientations shown.

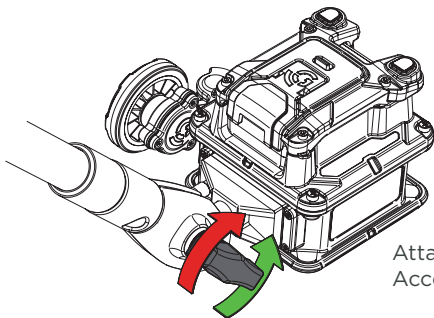


Attaching the Telescoping Pole Accessory (sold separately) to NX25.

Powering Flex NX

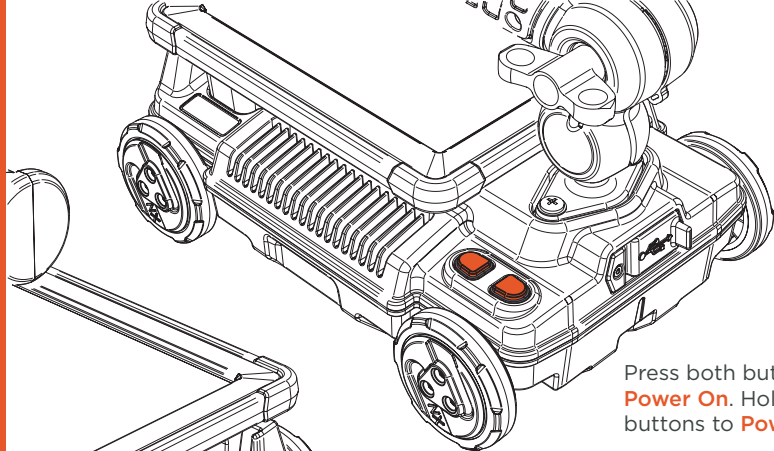


Press both buttons to **Power On**. Hold both buttons to **Power Off**.

Note: Battery contacts toward Flex NX and facing upward.

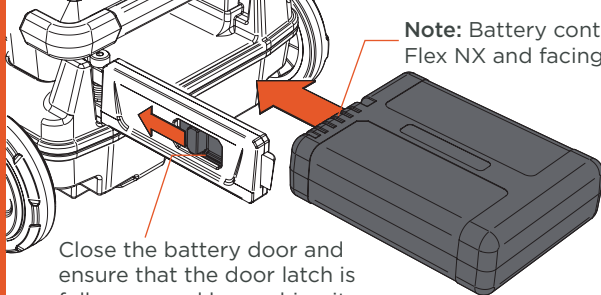


Close the battery door and ensure that the door latch is fully engaged by pushing it to the right.

To insert the battery, slide battery door latch to left, and open the door. Insert the battery in the orientation shown.

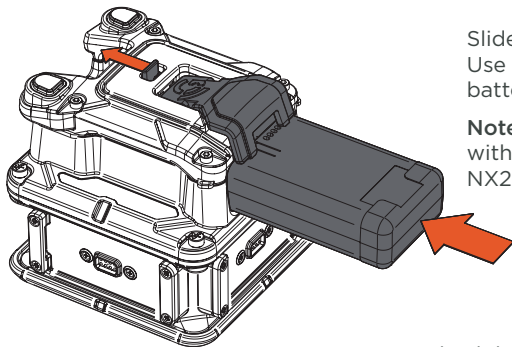


Slide battery latch lock forward.
Use battery to push up on the
battery latch to insert.

Note: Battery can only be inserted
with battery contacts toward
NX25 and facing downward.

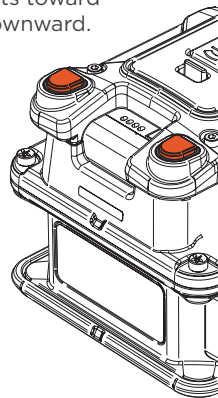

Press both buttons to
Power On. Hold both
buttons to **Power Off**.

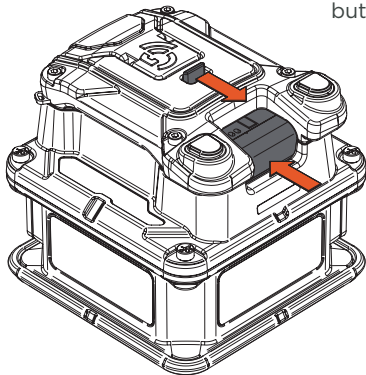


One-handed battery ejection:
Use thumb to press on battery
and index finger to slide the
battery latch lock. Pinching
fingers together will eject the
battery.

Flex NX incorporates two individual GPR antennas:
A **Standard Orientation** antenna (in front)
and a **Cross Polarized** antenna (in back).

Each antenna has three centered line lasers for highly accurate markouts. The center of each antenna is marked with a colored crosshair.

Forward Direction ←

Scanning with both antennas produces a more detailed and informative view of concrete targets, especially for complex jobs.

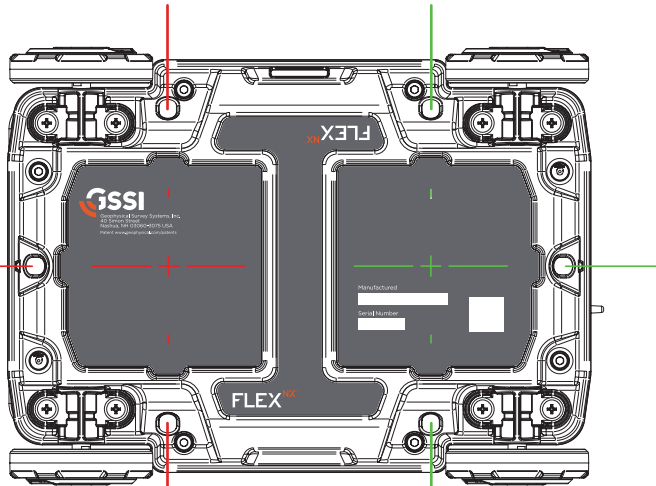


Red Lasers at center points of Standard Antenna



Green Lasers at center points of Cross Polarized Antenna

Flex NX and its accessory antennas (sold separately) connect wirelessly using Tap-to-Connect Near Field Communication (NFC) sensors.

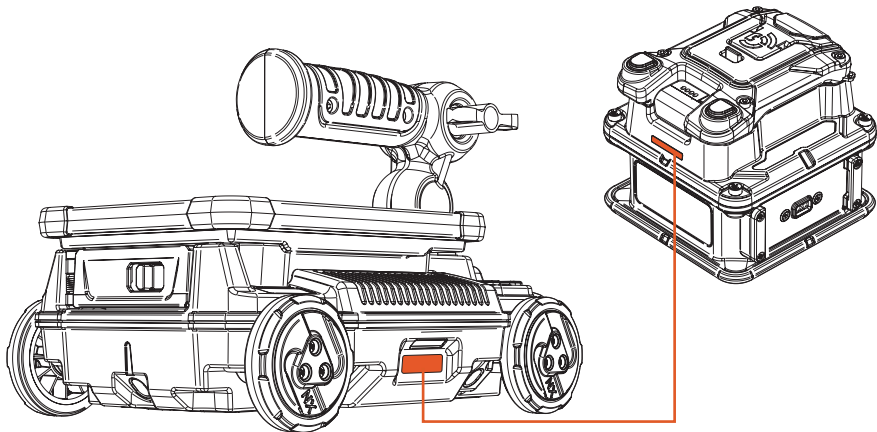

Power on Flex NX and then the accessory antenna. Wait for the accessory antenna's indicator light to flash blue, and then bring the NFC labels together to automatically pair. In future sessions, simply power on the accessory antenna; NFC pairing will not be required.




Flex NX Dashboard

After powering on, Flex NX will start every new session at the Main Dashboard. From here, you can tap the  icon to access system settings. Tap the  icon to quickly start a scan.





The Settings Menu is the control panel for customizing your Flex NX experience. We recommend enabling the lasers  to get started. WiFi  is enabled by default. When features are active you'll see them represented as colored icons on the Flex NX graphic. Tap the X to return to the Main Dashboard.

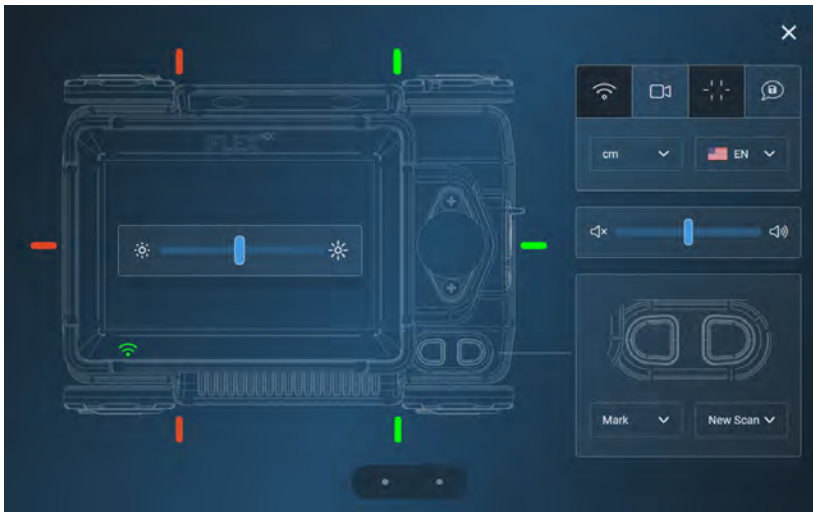

Select Concrete Type

When starting a new scan you'll be prompted to select the appropriate Concrete Type based the state of concrete cure. This menu only appears once during each session. **Note:** This setting will greatly impact depth readings. While collecting or viewing data, use the Depth Settings Menu to further refine the depth scale accuracy.

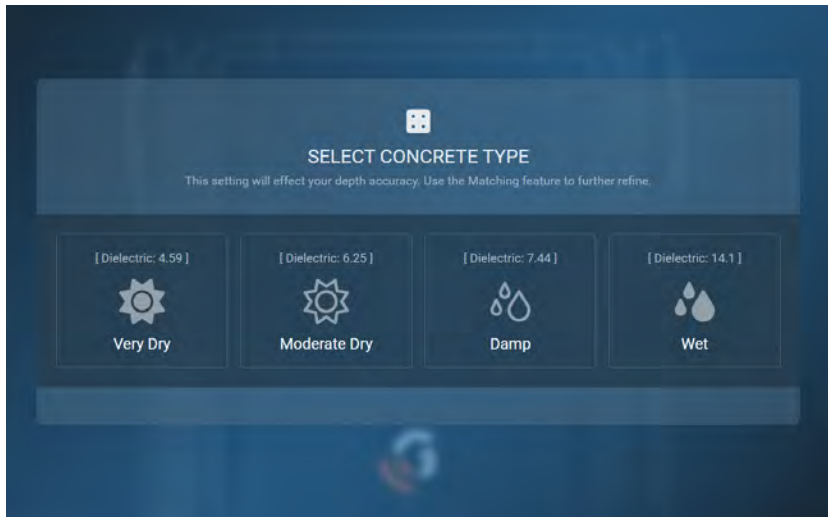

A blank data collection screen will appear. Tap the  icon to initiate a scan, and then move Flex NX forward to begin collecting data. Data will populate from left to right. Move Flex NX in reverse to view backup cursors that align with the **red** and **green** side lasers.




View the Top Navigation Bar




Access and adjust the Gain, Display and Depth settings.




Stop data collection

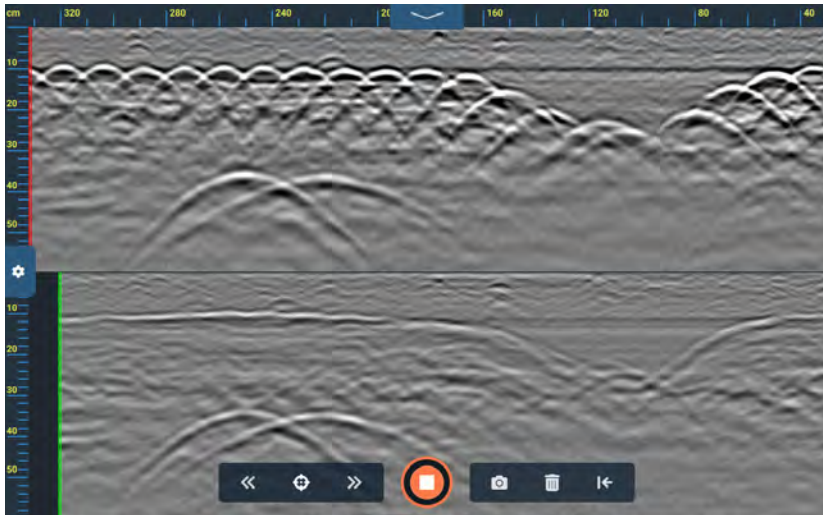


The GPR data will reveal two distinct categories of reflections: targets, and layers. Targets, such as rebar and conduit, are discrete objects below the surface and are represented by hyperbolas (orange boxes). Layers are continuous features, like the slab/grade contact (blue box).

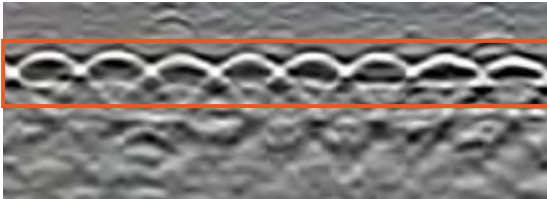

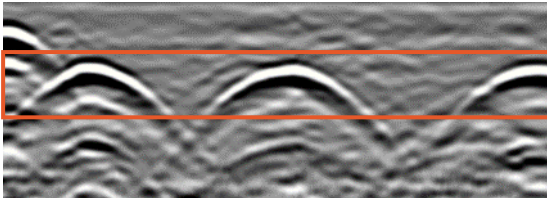

Closely-spaced targets, like wire mesh, produce abundant hyperbolas that overlap on the sides.

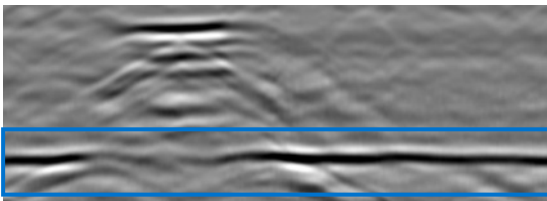


Rebar and other metallic targets produce bright hyperbolas. Rebar targets are often spaced wider than wire mesh targets.




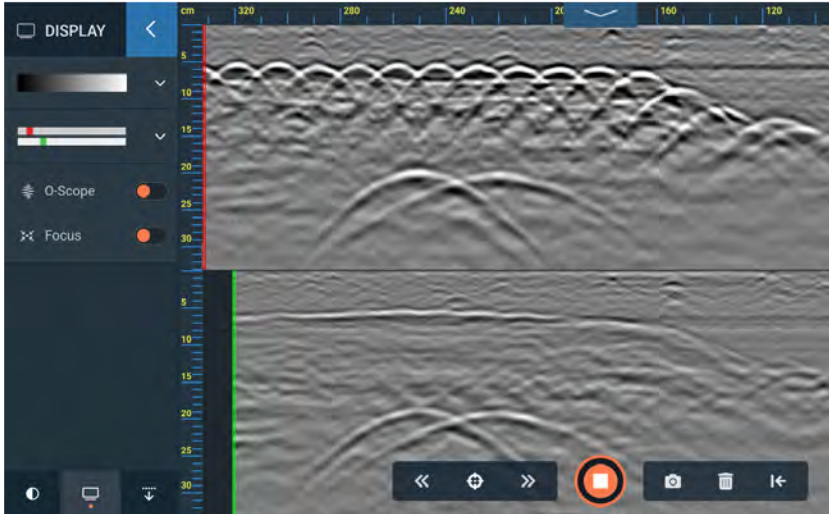
Layers do not produce hyperbolas. They appear as continuous features that often vary in brightness and depth.

While collecting data you can tap the  icon on the depth scale. This will open a window with three nested menus: **Gain**, **Display**, and **Depth**. For now, click the Gain icon  in the lower left. Here you can use the slider to adjust the overall contrast of the data, or select one of three general depth levels (shallow, medium, deep) to selectively adjust contrast.

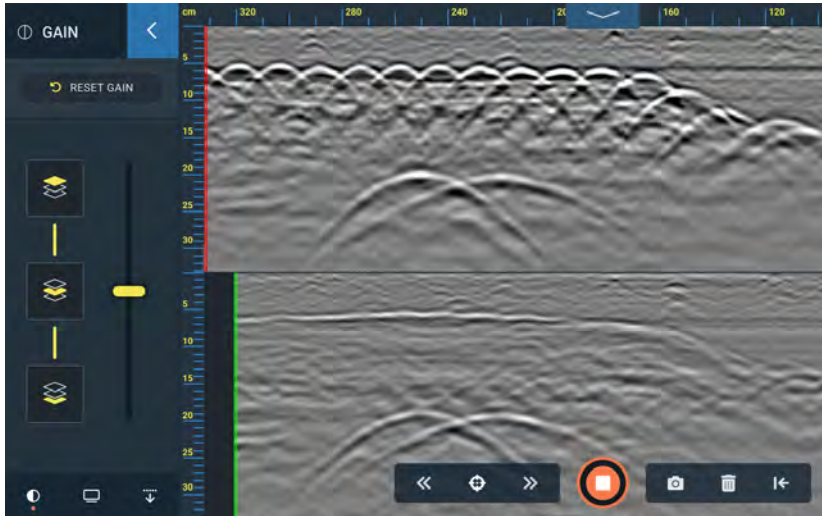

Adjusting Display Options

Tap the  icon at the bottom of the panel to adjust Display settings. Here you can quickly change your data display from split screen with both antennas to full screen options for the standard (front) and cross polarized (rear) antennas. You can also adjust color tables, toggle the O-Scope, or enable Focus Mode.



Limited Warranty, Limitations of Liability and Restrictions

Geophysical Survey Systems, Inc. hereinafter referred to as GSSI, warrants that for a period of 24 months from the delivery date to the original purchaser this product will be free from defects in materials and workmanship. EXCEPT FOR THE FOREGOING LIMITED WARRANTY, GSSI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. GSSI's obligation is limited to repairing or replacing parts or equipment which are returned to GSSI, transportation and insurance prepaid, without alteration or further damage, and which in GSSI's judgment, were defective or became defective during normal use. GSSI ASSUMES NO LIABILITY FOR ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES OR INJURIES CAUSED BY PROPER OR IMPROPER OPERATION OF ITS EQUIPMENT, WHETHER OR NOT DEFECTIVE. Before returning any equipment to GSSI, a Return Material Authorization (RMA) number must be obtained. Please call the GSSI Customer Service Manager who will assign an RMA number. Be sure to have the serial number of the unit available.

Regulatory Information: <https://www.geophysical.com/regulatoryinformation>

Copyright © 2023 Geophysical Survey Systems, Inc.

All rights reserved including the right of reproduction in whole or in part in any form.

Published by Geophysical Survey Systems, Inc., 40 Simon Street Nashua, New Hampshire 03060-3075 USA. Printed in the United States. Flex NX, Nexus, and GSSI Fusion are registered trademarks of Geophysical Survey Systems, Inc.



Flex NX Support



Geophysical Survey Systems, Inc
40 Simon Street
Nashua, NH 03060-3075 USA

Patent www.geophysical.com/patents